Appendix A – Oyster Restoration Projects within Manatee County

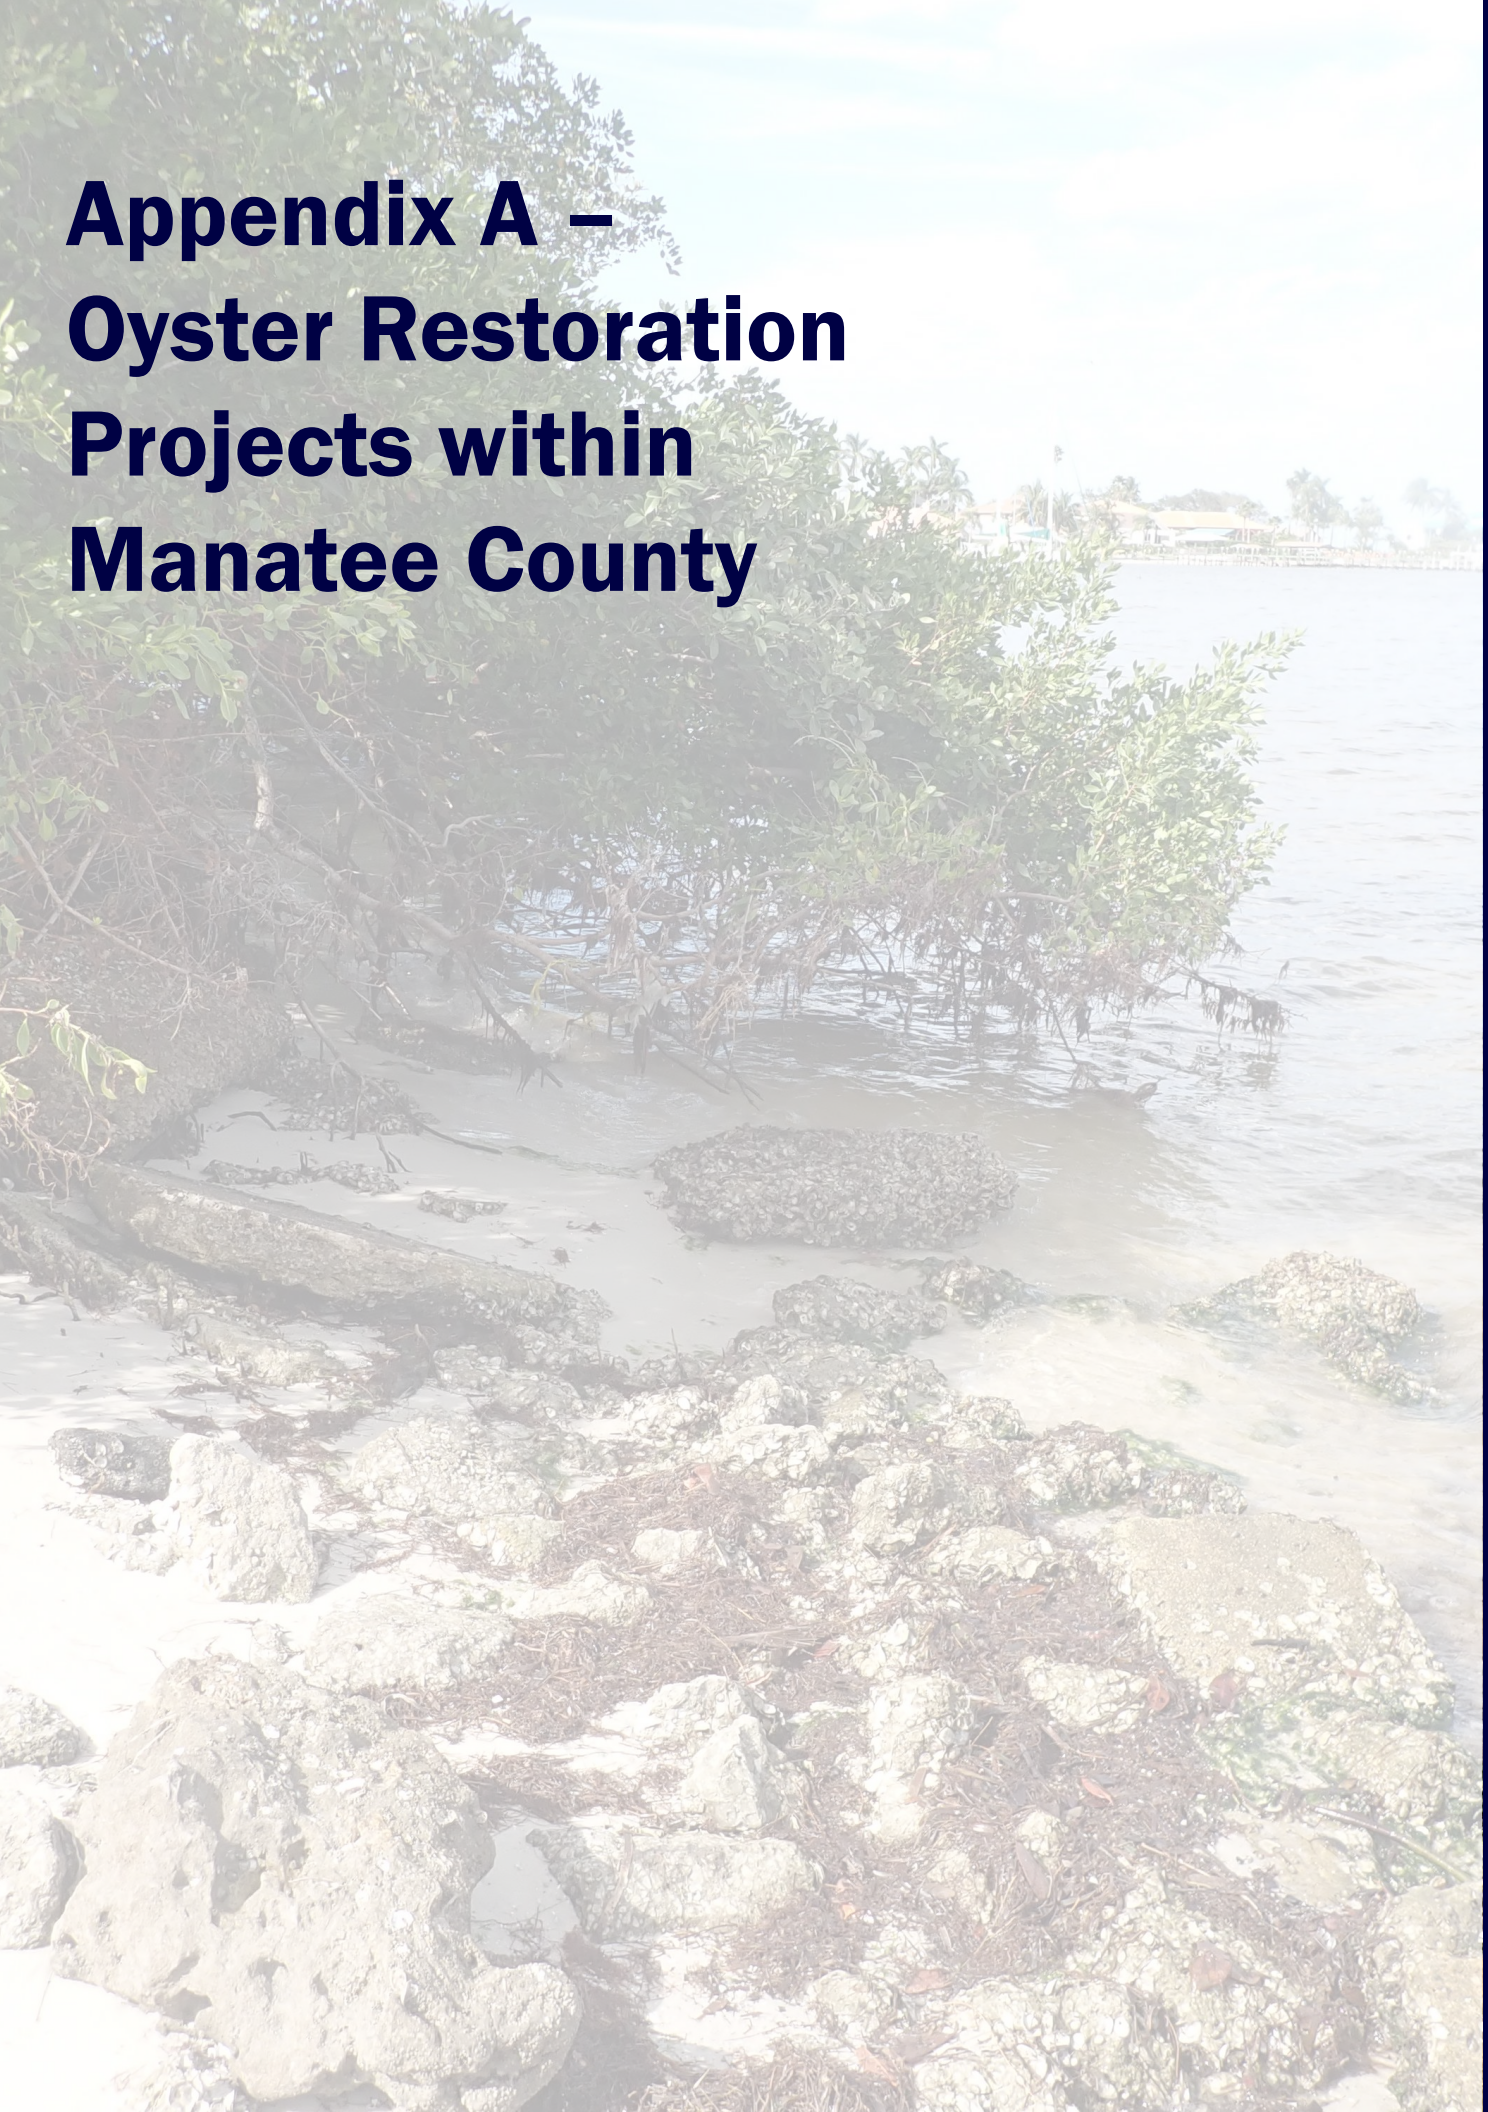

Oyster Restoration **Projects within Manatee County**

Project/Site Name	Approximate Center Point	Size	Completion Status	Summary Description	Project Conducted By	Condition of Oysters (if known)	Permit Reference
Robinson Preserve Oyster Bars	27.512451, -82.671136	1 acre	Completed by staff and volunteers 2015-2017.	Intertidal placement of combination of fossilized shell, lime rock and recycled shell.	Manatee County	Very good.	Completed as maintenance of an existing permitted stormwater management system.
Robinson Preserve Expansion Oysters	27.507869, -82.667571	2.1 acres	Completed. Tidal waters exposure on December 17, 2020.	Low intertidal placement of fossilized oyster shell.	Manatee County	Good. Some areas of sedimentation. Showing positive oyster recruitment as of December 2023.	Permitted as part of the Robinson Preserve Expansion Project.
Rookery at Perico Preserve Oysters	27.501794, -82.667571	Approx. 500 linear ft	Completed.	Intertidal placement of oyster bags by volunteers.	Manatee County	Very Poor. Oyster recruitment only occurs on oyster bags within flushing channels. Low DO and high temp likely cause of failure.	Permit Modification to Rookery at Perico Preserve Permits.
Perico Bayou Oyster Bars	27.496968, -82.669272	6,852 square ft	Completed.	Intertidal placement of recycled oyster shell.	Manatee County	Very good.	ERP 41-0374692-001-EI & USACE SAJ-2018-03376
Desoto Memorial Oyster Bags	27.524127, -82.641640	Unknown	Completed 2017.	Intertidal placement of bagged recycled oyster shell.	Univ. Central Florida - CEELAB	Poor. bags are not withstanding wave energy in locations observed (see center point location reference) in November 2023.	Unknown.
Palmetto Bay Preserve Oyster Restoration	27.510843, -82.571239	Approx. 20 acres	Future. Planned implementation for 2024.	Subtidal Placement of oyster domes in clusters spaced at 100' across project area excluding navigation channel.	City of Palmetto	N/A	ERP 1-0387792-001-EI & USACE SAJ-2020-00744

Project/Site Name	Approximate Center Point	Size	Completion Status	Summary Description	Project Conducted By	Condition of Oysters (if known)	Permit Reference
Bradenton Riverwalk, Phase 2A (Waterward Improvements)	27.498901, -82.550125	Approx. 300 linear ft of shoreline	Completed. additional planned via permit mod for Suncoast Water Keepers Settlement	Placement of oyster domes, oyster bag pyramids, & riprap shoreline hardening.	City of Bradenton	Unknown	SWFWMD ERP App ID: 824911 & Permit No. 43045093.001
Dot-Dash-Dit Critical Wildlife Area (CWA) (Audubon Coastal Sanctuaries)	27.499225, -82.524436	6,648-ft breakwater	Future.	Placement of Goliath Reef Balls as breakwaters to nesting colony islands.	Audubon Coastal Sanctuaries	N/A	ERP 41-0408792-002-EI
Manatee County & ORE Restoration Aquaculture Areas	27.522043, -82.482419; 27.524858, -82.485642	16.19 acres	Future.	Cultch Placement per FDACS Management Agreements	Manatee County (6.19 Ac) ORE (10 Ac)	N/A	Not Assigned as of 12/18/23
Sarasota Bay – Oyster Habitat Restoration (34th Street Oyster Bars)	27.422148, -82.596411	0.03 acres – four 20-ft diameter oyster reef beds	Completed 2017.	Four 20-ft diameter oyster reef beds. Ring of bags filled with loose shell.	Sarasota Bay Estuary Program	Unknown	ERP 41-0341533-001-EI
Sarasota Bay – Oyster Habitat Restoration (LongBar Oyster Bars)	27.436481, -82.634186	Five approximately 50-ft diameter oyster reef beds	Completed around 2012.	Approximately 50-ft diameter ring of bags filled with loose shell.	Sarasota Bay Estuary Program	Unknown	ERP 41-0299496-001-EI NOTE: Project was permitted on submerged lands owned by private landowner. The landowner was not aware. This was an issue.